

HVS-2240OU/2240OUA, 3320OU/3320OUA, 2120ROU Datasheet

1. Specifications

Basic specifications

Temperature	0°C to 40°C		
Humidity	30% to 90% (no condensation)		
Power	AC100V - 240V ±10% 50/60Hz		
Consumption	[2240OU]	46 W (at 100-120 V)	46 W (at 220-240 V)
	[2240OUA]	57 W (at 100-120 V)	47 W (at 220-240 V)
	[3320OU]	67 W (at 100-120 V)	63 W (at 220-240 V)
	[3320OUA]	77 W (at 100-120 V)	75 W (at 220-240 V)
	[2120ROU]	46 W (at 100-120 V)	46 W (at 220-240 V)
Dimensions	[2240OU/OUA]	1060 (W) x 354 (D) x 155 (H) mm	
	[3320OU/OUA]	1196 (W) x 494 (D) x 155 (H) mm	
	[2120ROU]	430 (W) x 420 (D) x 127 (H) mm	
Weight	[2240OU]	12 kg	
	[2240OUA]	15.5 kg	
	[3320OU]	22 kg (23 kg w/ redundant power supply)	
	[3320OUA]	22 kg	
	[2120ROU]	8 kg	
Consumables(*1) (at 24-hour operation)	Power supply unit:	Replace every 5 years.	
	SBC battery:	Replace every 2 years after factory shipment. (2240OU, 3320OU and 2120ROU)	
		Replace every 3 years after factory shipment. (2240OUA and 3320OUA)	

(*1) Replace the battery every 1 year when the unit powered off for an extended period.

Technical specifications

Supported switcher	HVS-2000 HVS-6000/6000M		
Number of lines	[2240OU/OUA]	2	
	[3320OU/OUA]	3	
	[2120ROU]	2	
Number of bus buttons	[2240OU/OUA]	24	
	[3320OU/OUA]	32	
	[2120ROU]	12	
Interfaces			
VGA	For PC monitor connection		
HDMI	For touch panel connection		
USB	[2240OU/2240OUA and 3320OU/OUA]	Panel: 2.0 (Type-A) x 2 Rear: 2.0 (Type-A) x 4	
	[2120ROU]	Panel: 2.0 (Type-A) x 2 Rear: 3.0 (Type-A) x 2	
LAN 1 (MAIN)	RJ-45 x 1 For HVS-2000 connection		
LAN 2 (SUB)	[2240OU/OUA and 3320OU/OUA]	RJ-45 x 1 For HVS-2000 connection	
	[2120ROU]	RJ-45 x 2 For HVS-2000 connection	
GPI IN/TALLY OUT	[2240OU/OUA and 3320OU/OUA]	25-pin D-sub (female) x 1 (inch screws) 12-input/12-output	

GPI I/O	[2120ROU]	5-pin D-sub (female) x 1 (inch screws) 6-input/6-output
DC OUTPUT(5V)	[2120ROU]	4-pin XLR x 1 For LED lam (w/ power switch and controller)
LAMP	[2120ROU]	USB 2.0 (Type-A) x 1 For LED lighting

HVS-2240OU / 3320OU Options

HVS-2000PSO	Redundant power supply unit for HVS-2240/3320OU
-------------	---


HVS-2240OU/2240OJA, 3320OU, 2120ROU Accessories

Bus button partition plate (2240OU/2240OJA, 3320OU), User button cover plate (3320OU), Control cables, AC Cord or AC adapter

2. External Dimensions


(All dimensions in mm.)

HVS-2240OU

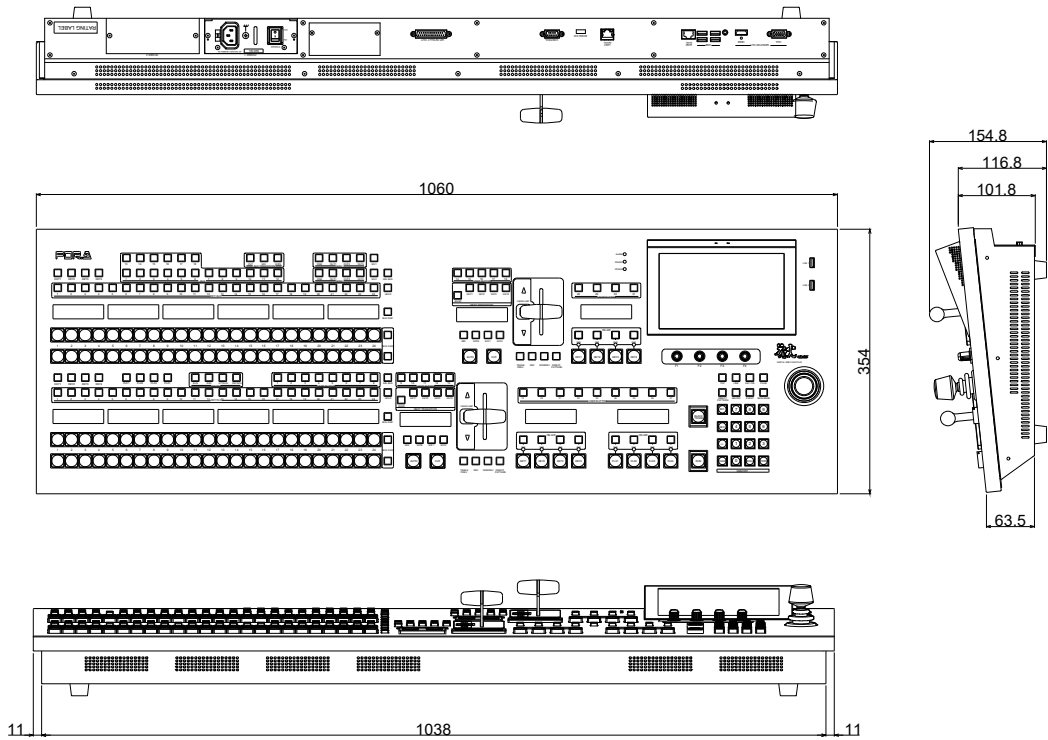


HAV-2240OUA

(All dimensions in mm.)

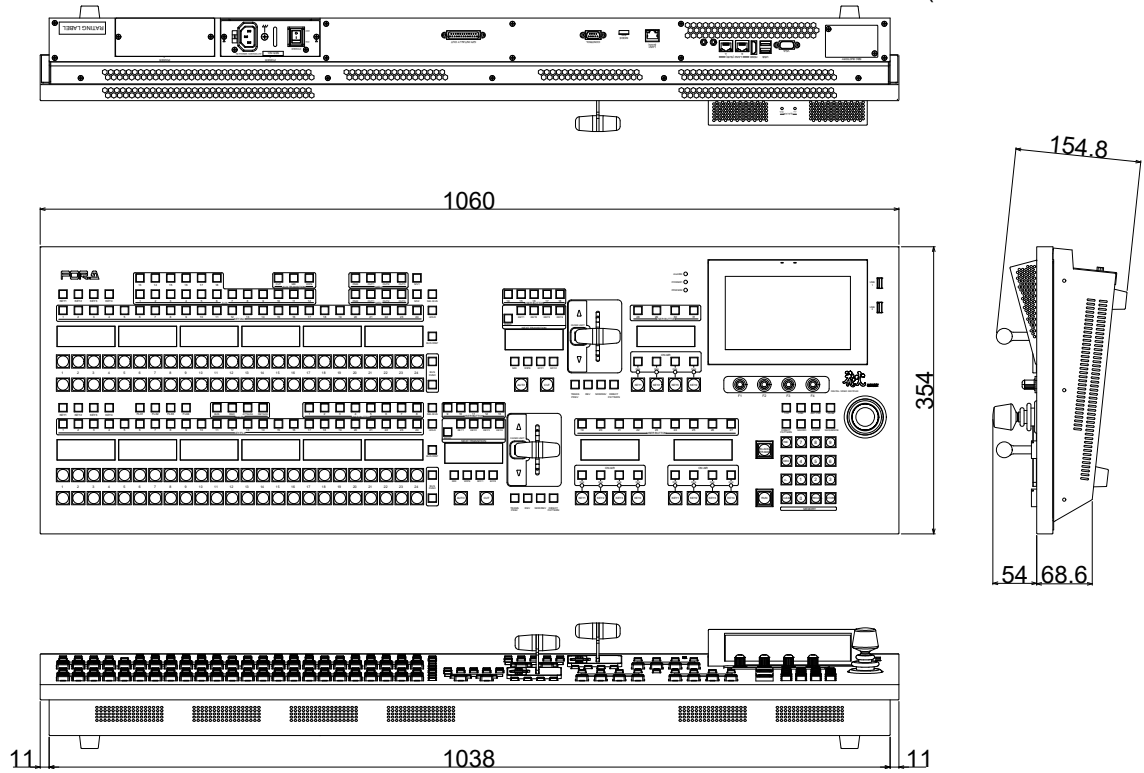


HVS-3320OU

(All dimensions in mm.)

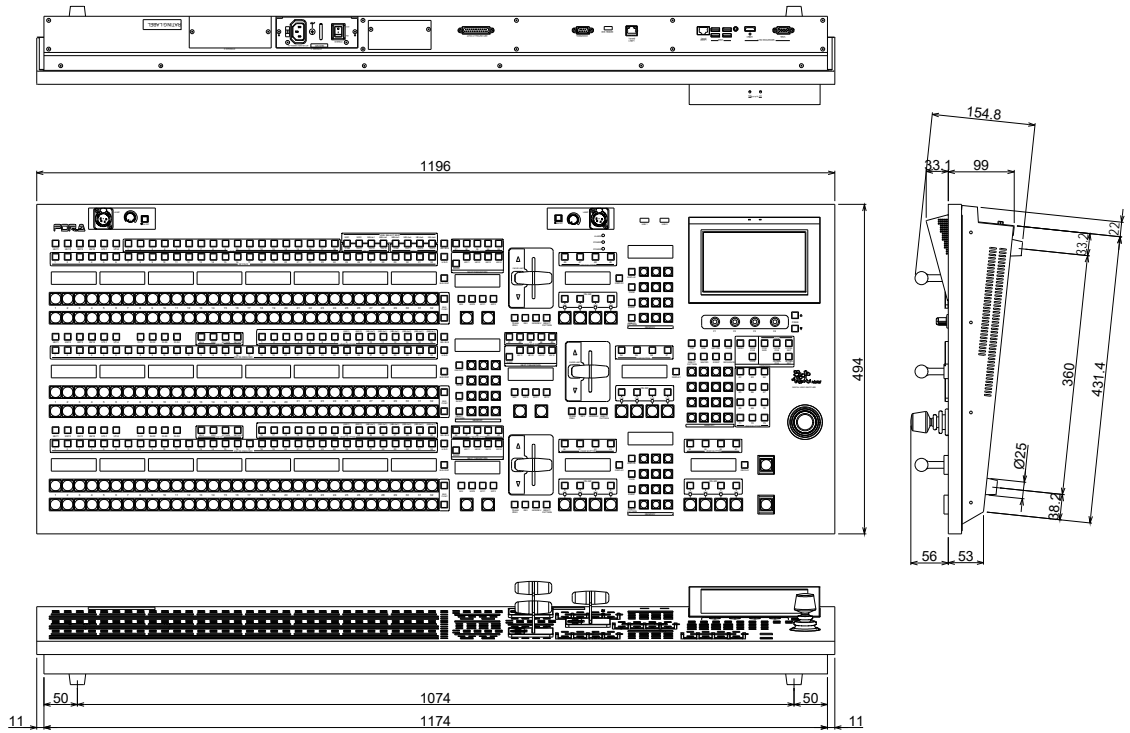

HVS-3320OUA

(All dimensions in mm.)

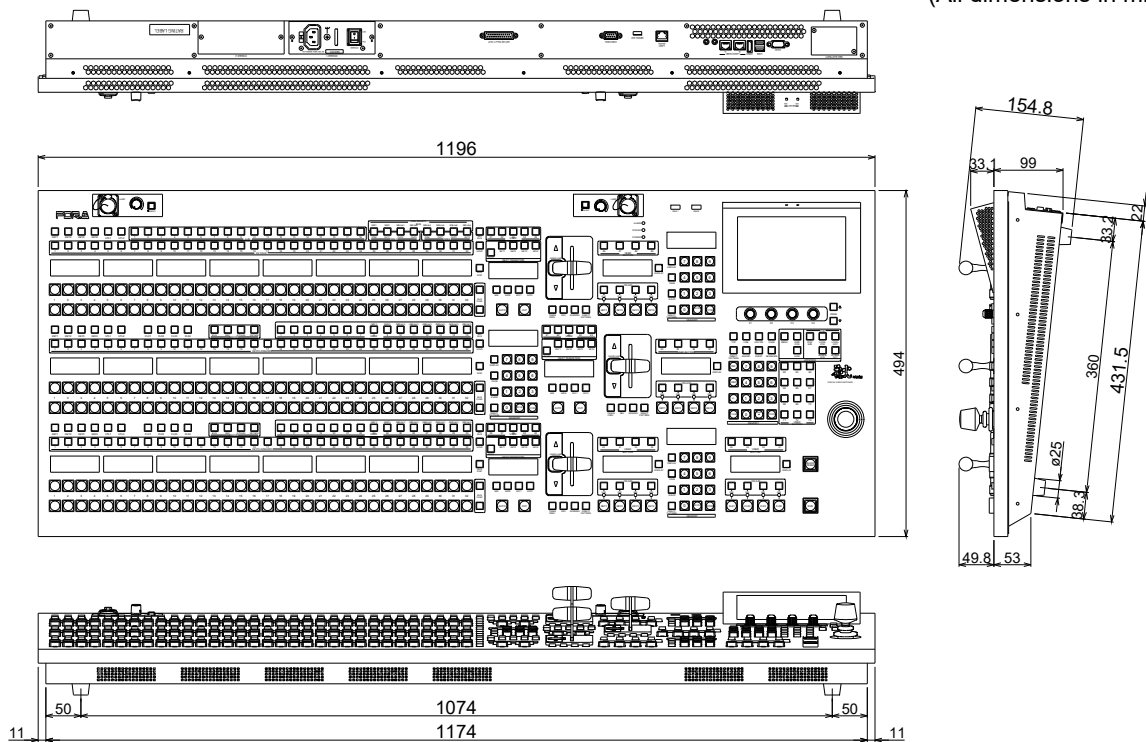

HVS-2120ROU

