



# 12G/3G/HD/SD/ASI ROUTING SWITCHER MFR-1000



Powerful 4K and 8K routing with 4K-UHD conversion and 12G-SDI compatibility across all inputs and outputs.

Configure a matrix of up to 16 x 16. 12G-SDI compatibility across all inputs and outputs. Optional AVDL functionality enables smooth changeover without noise or disruption.

## 12G-SDI Support


Conventional 3G-SDI routing switchers require 4 crosspoints to input and output 4K video. With 12G-SDI, 4K can be carried over a single crosspoint. The MFR-1000 also determines the type of SDI input automatically—no need to worry about what signals are supplied.



## AVDL Functionality

AVDL functionality\* can be added to 8 outputs, enabling smooth changeover without noise or disruption. Produces clean switched output for video input within the adjustment range.

\*Optional

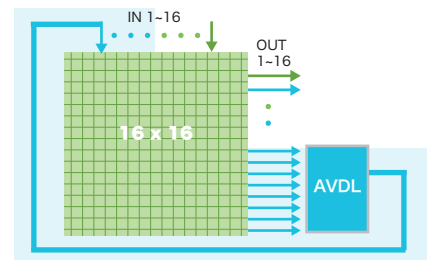

## Solid Performance

### Multi-format video input and output

Support for 12G/3G/HD/SD-SDI input and output. No need to worry about signal formats, thanks to auto signal detection.

### Outstanding redundancy

As core system components, FOR-A routing switchers can incorporate redundancy to ensure nonstop operation in case of problems.

### GUI-based configuration

Built-in webserver enables immediate setup without installing software on external devices. Via this interface, settings can also be configured in an offline environment.

### Versatile crosspoint control

Besides typical crosspoint switching, the unit enables a variety of crosspoint control.

■ Salvo ■ Take ■ Link ■ Error-proofing (Inhibit, Lock)

### Remote control units

10 control units are available to suit specific applications.  
(for the detailed information, please see the "Lineup" in the back.)

## Optional Video Cards

### MFR-8SDI12G Input Card

Supports 8 inputs of 12G/6G/3G/HD/SD-SDI and DVB-ASI.

### MFR-8AVDL12G AVDL Function Card

AVDL functionality can be added to 8 outputs

### SNMP monitoring

Can be integrated into an SNMP monitoring system. Enables monitoring of various operational states, such as power, fan, and CPU status, SDI signal input or output, and crosspoint errors. If system failure and recovery occur, SNMP traps are sent to managers.

### Interface expansion units

Interface expansion units are available to suit specific applications.

■ MFR-TALM: Tally Manager  
■ MFR-GPI: GPI Unit

### Front control panel

Front panel enables menu display and notification of alarm details.

### Connectivity with other products


Remote-controllable through the Ethernet or serial ports. Compatibility with common protocols such as TSL and Harris enables tally linkage or auto source name tracking for crosspoint switching. As well as our exclusive interface to the FOR-A line of HVS production switchers and standalone multi viewers.

### MFR-8SDO12G Output Card

Supports 8 outputs of 12G/6G/3G/HD/SD-SDI and DVB-ASI.

### MFR-10PS Redundant Power Supply Unit

## Remote Control Unit Lineup

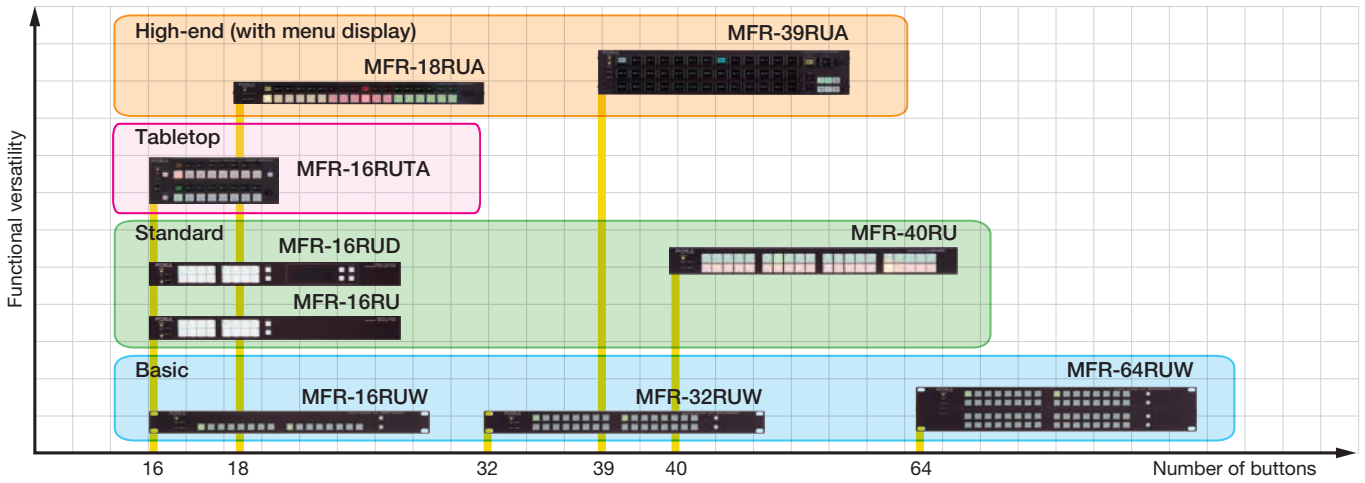

## Accessories

AC cord, rubber feet, CD-ROM(operation manual(PDF), quick setup guide.

## MFR-1000 Datasheet

### 1. Specifications

#### Basic specifications

Temperature	0°C to 40°C
Humidity	30% to 90% (no condensation)
Power	100V AC to 240V AC $\pm$ 10%, 50/60Hz
Consumption	100V AC to 120V AC: 90 VA (88 W) 220V AC to 240V AC: 107 VA (86 W)
Dimensions	430 (W) x 44 (H) x 325 (D)mm EIA 1RU 480 (W) (Including rack mount brackets)
Weight	6 kg
Consumables (at 24-hour operation)	Fan 1 (P-1630): Replace every 4 years. Fan 2 (P-1631): Replace every 4 years. Fan 3 (P-1632): Replace every 4 years. Fan 4 (P-1633): Replace every 4 years. Power supply unit: Replace every 5 years.

#### Technical specifications

Video Formats	
UHD 4K (12G-SDI)	2160/60p, 59.94p, 50p (SMPTE ST 2082-10)
HD (3G-SDI)	1080p/ 60, 59.94, 50 (SMPTE424M)
HD (HD-SDI)	1080i/ 60, 59.94, 50, 1080p/ 30, 29.97, 25, 24, 23.98 1080PsF/ 30, 29.97, 25, 24, 23.98 720p/ 60, 59.94, 50 (SMPTE292M)
SD (SD-SDI)	525/59.94i, 625/50i (SMPTE259M)
DVB-ASI	Compliant to EN 50083-9
Input/Output Matrix	Standard: 8 x 8, Max.:16 x 16
Video Input	
MFR-8SDI12G (Option)	12G/3G/HD/SD-SDI Input Card - 75 $\Omega$ BNC x 8  Cable Equalization - 12G-SDI: 70m (L-5.5CUHD cable) - 3G/HD-SDI: 100m (5C-FB cable) - SD-SDI: 200m (5C-2V cable)
Video Output	
MFR-8SDO12G (Option)	12G/3G/HD/SD-SDI Output Card - 75 $\Omega$ BNC x 8 (Auto reclocking)

AVDL Function	
MFR-8AVDL12G (Option)	AVDL function card  Output alignment -+1H~5H against the reference input signal. Adjustment range -Variable depending on output adjustment range +1H Output: -4.1H to +0.9H +2H Output: -3.1H to +1.9H +3H Output: -2.1H to +2.9H +4H Output: -1.1H to +3.9H +5H Output: -0.1H to +4.9H
Ancillary Data Packet	-Quiet Switch: OFF All ancillary data in input signal is passed through. (No compensation on signal switching noise.) -Quiet Switch: ON – Ancillary data as listed below are embedded by reproduction. -SMPTE ST352 (Video payload ID) -SMPTE ST299-1 (Embedded audio) 16 channels (Group1 to 4) PCM, 48kHz 24bit synchronous only (For 12G-SDI, Group1-4 in Stream 1 passed through)
Reference Input	BB: NTSC: 0.429Vp-p / PAL: 0.45Vp-p or Tri-level Sync: 0.6 Vp-p 75Ω BNC x 1, loop-through (Terminate with a 75Ω terminator if unused.)
Interfaces	
MFR-LAN	10/100BASE-TX RJ-45 x 1 (For connecting up to 128 RU/GPI units.)
PC-LAN	10/100BASE-TX, RJ-45 x 1 (for PC operation/ External connection)
GPI IN/TALLY OUT	25 pin D-sub (female) x 1

### Options


MFR-8SDI12G	8 SDI-input card
MFR-8SDO12G	8 SDI-output card
MFR-8AVDL12G	AVDL function card
MFR-10PS	Redundant power supply unit (with AC cord and AC cord clamp.)
MFR-8RUA/18RUA/39RUA MFR-39RU/40RU/18RU MFR-16RU/16RUD/16RUTA MFR-16RUW/32RUW/64RUW	Remote Control Unit
MFR-GPI	Interface Expansion Unit
MFR-TALM	Tally Manager Unit

### Accessories

AC cord, Rubber feet, CD-ROM, and Quick setup guide

**2. External Dimensions**

(All dimensions in mm.)

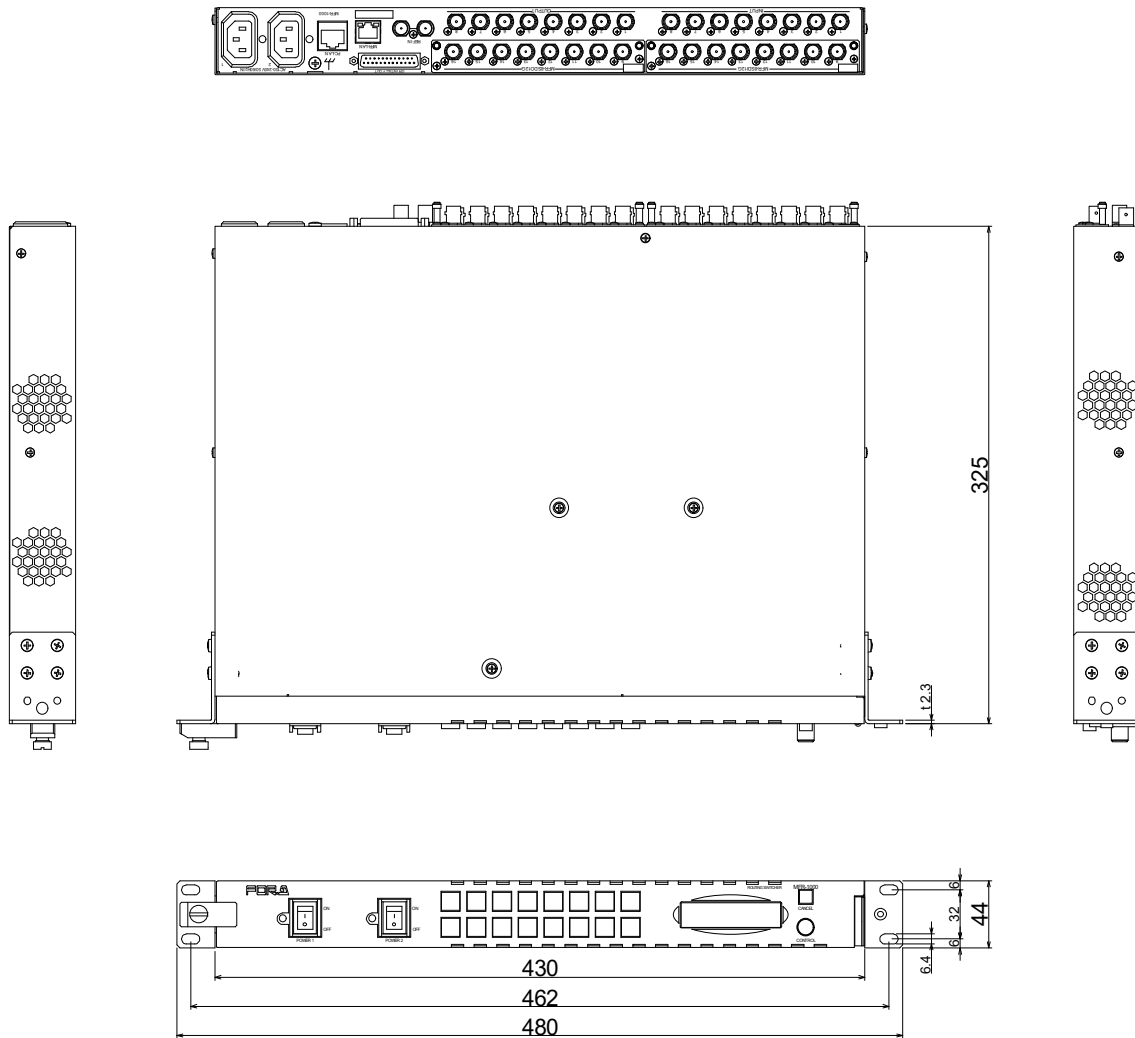



---

**FOR-A COMPANY LIMITED** [www.for-a.com](http://www.for-a.com)ISO 9001 and 14001 certified  
(Sakura R&D)**Head Office:**3-8-1 Ebisu, Shibuya-ku, Tokyo 150-0013, Japan  
Tel: +81 (0)3-3446-3936**FOR-A Corporation of America  
Corporate Office/Service Center:**11155 Knott Ave., Suite G, H & I, Cypress, CA 90630, U.S.A.  
Tel: +1 714-894-3311**FOR-A Corporation of America Northeast Office:**1360 Clifton Ave., Clifton, NJ 07012, U.S.A.  
Tel: +1 973-220-8471**FOR-A Corporation of America Southeast Office:**

Tel: +1 305-773-7608

**FOR-A Corporation of America Support Center:**2400 N.E. Waldo Road, Gainesville, FL 32609, U.S.A.  
Tel: +1 352-371-1505**FOR-A Latin America and the Caribbean Miami Office:**

Tel: +1 657-600-5759

**FOR-A Latin America and the Caribbean Sao Paulo Office:**

Tel: +55 (0)11-99913-3751

**FOR-A Europe S.r.l.:**Via Volturmo, 37, 20861 Brugherio MB, Italy  
Tel: +39 039-916-4811**FOR-A UK Limited:**Trident Court, 1 Oakcroft Road, Chessington, KT9 1BD, UK  
Tel: +44 (0)20-3044-2935**FOR-A Italia S.r.l.:**Via Volturmo, 37, 20861, Brugherio MB, Italy  
Tel: +39 039-881-086/103**FOR-A Corporation of Korea:**1007, 57-5, Yangsan-ro, Yeongdeungpo-gu, Seoul 07271, Korea  
Tel: +82 (0)2-2637-0761**FOR-A China Limited:**1618 Huateng Building, No. 302, 3 District, Jinsong, Chaoyang,  
Beijing 100021, China  
Tel: +86 (0)10-8721-6023**FOR-A Middle East-Africa Office:**DSC Tower, Office 207, Dubai Studio City,  
P.O. Box 502688, Dubai, UAE  
Tel: +971 4-551-5830**FOR-A India Private Limited. Corporate Office:**Unit No: 800, 8th Floor, World Trade Tower "B", C-1,  
Sector-16, Noida-201301, Uttar Pradesh, India  
Tel: +91-120-04238674/+91-120-4252330**FOR-A India Private Limited. Mumbai Office:**202-203, 2nd Floor, Wellington Business Park No-01, Marol, Off,  
Andheri Kurla Road, Andheri East, Mumbai-400059, Maharashtra,  
India  
Tel: +91-022-49795570**FOR-A South East Asia Office:**Studio 09, Rm. A1, 3/F., Phase 1, Hang Fung Ind. Bldg., 2G Hok  
Yuen St., Hung Hom, Hong Kong  
Tel: +852 2110-9227