

HD/SD MULTI VIEWER MV-42HS

The MV-42HS is a 4-channel multi viewer that resizes and display up to 4 inputs of HD-SDI and SD-SDI signals on a single screen.




The MV-42HS is most suitable for monitoring systems with mixed HD-SDI and SD-SDI input signals. Audio level metering of SDI embedded audio signals is provided allowing audio signal presence to be monitored.

- Support for mixed input of HD-SDI and SD-SDI signals (Mixed and asynchronous input supported)
- Support for mixed input of analog composite (option)
- Audio level metering for HD/SD-SDI embedded audio signals (Up to 8 channels display)
- HD-SDI and DVI-D (1920 x 1080 or 1280 x 720) high definition image output
- Full screen, 2-split (right and left), and quad screen output selectable
- Video loss detection
- Display of ancillary time code (ATC) embedded on HD/SD-SDI input signals
- Title display of up to 16 characters for each input (alphanumeric and symbol)
- With the interface option, genlock input, color selectable (red and green) tally indicator display, remote control via LAN, and date/time display can also be supported



Compact Size

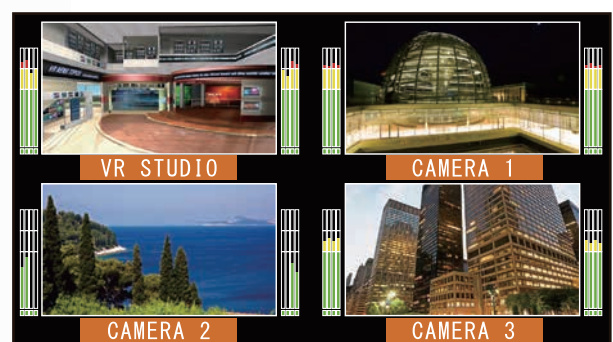

Display Image (Quad View)

MV-42HS Datasheet

1. Specifications

Basic specifications

Temperature	0°C to 40°C
Humidity	30% to 90% (no condensation)
Power	12V DC (DC jack) * AC adaptor can be separately purchased. Use an AC adaptor that meets the following requirements. Output voltage: 12V DC, Output ampere: 2A, Inrush current: 30A, Connector: JEITA RC-5320A Standard Voltage Class4 * The MV-42HS connector is HOSIDEN-produced HEC3800-01-010. Center positive voltage.
Consumption	19 VA (10 W) (at 100V), 22 VA (10 W) (at 200V) With MV-42IF/IFA option: 20 VA (11 W) (at 100V), 24 VA (10 W) (at 200V)* With MV-42AI option: 23 VA (12 W) (at 100V), 27 VA (12 W) (at 200V)* With MV-42IF/IFA and MV-42AI options: 24 VA (13 W) (at 100V), 28 VA (13 W) (at 200V)* * Used with the optional AC adaptor.
Dimensions	212 (W) x 44 (H) x 161 (D)mm EIA 1 RU Half Rack 480 (W) (Including single or dual rack mount brackets)
Weight	1.16 kg
Consumables (in constant operating 24 hours a day at normal temperature)	Cooling fan: P1472 Replace every 3 years

Technical specifications

Video input	4 inputs in the following video formats (Mixed input, asynchronous acceptable)
HD-SDI	1.485Gbps or 1.485/1.001Gbps, 75Ω BNC Color format: YCbCr (4:2:2) Quantization: 10-bit
SD-SDI	270Mbps, 75Ω BNC Color format: YCbCr (4:2:2) Quantization: 10-bit
Video format	1080/60i, 1080/59.94i, 1080/50i, 1080/30p, 1080/30PsF, 1080/29.97p, 1080/29.97PsF, 1080/25p, 1080/25PsF, 1080/24p, 1080/24PsF, 1080/23.98p, 1080/23.98PsF, 720/60p, 720/59.94p, 720/50p, 720/24p, 720/23.98p, 525/60(NTSC) , 625/50(PAL)
Video output	
HD-SDI	1 output, 1.485Gbps or 1.485/1.001Gbps, 75Ω BNC Color format: YCbCr (4:2:2) Quantization: 10-bit * Embedded audio is unsupported.

DVI-D	1 output, DVI-D connector Color format: RGB Quantization: 8-bit * HDCP is unsupported.
Video format	1080/59.94i, 1080/50i, 720/59.94p, 720/50p * No input/output frame rate converter. A frame rate difference between the input and output may result in a repeat frame or drop frame.
I/O delay	Max. 1.5 frames
Screen display	Full screen, 2-split screen, Quad-split screen
Audio level metering	Audio level metering for HD/SD-SDI input signal embedded audios (Up to 8 channels)
Time code display	Embedded time code display for HD/SD-SDI signals
Title display	Max. 16 characters x 1 line for each input channel Character types: Alphanumeric characters and symbols
Data backup	Stores the setting data to EEPROM
Interface	For title settings and remote control over the unit
RS-232C	9-pin, D-sub male, x1 Baud rate: 38,400bps, data length: 8-bit, stop bit: 1-bit, Parity: NONE

MV-42AI (Analog Composite Input Card) Option

Video input	4 inputs (Select analog composite or SDI input for each input channel in the menu.) Analog composite: 1.0 Vp-p, 75 Ω, BNC Color format: YCbCr (4:2:2) Quantization: 8-bit
Video format	NTSC, PAL

MV-42IF/IFA (Interface Card) Option

Video input	4 inputs (Select analog composite or SDI input for each input channel in the menu.) Analog composite: 1.0 Vp-p, 75 Ω, BNC Color format: YCbCr (4:2:2) Quantization: 8-bit
Video format	NTSC, PAL
Genlock input	1 input, 75 Ω, BNC BB: NTSC 0.429 Vp-p BB: PAL 0.45 Vp-p Tri-level sync: 0.6 Vp-p
LTC input	1 input, BNC, high-impedance SMPTE time code: 1.0 Vp-p, within ±6 dB





REMOTE/TALLY input	9-pin D-Sub female: max. 8 inputs Red/green tally inputs 1 to 4 (Negative logic level signal or Make-contact) Full screen automatic switching, Full screen display, Multi-channel screen display, Internal clock correction (Adjust in) and Alarm reset (Negative logic pulse signal or make contact)
Date/Time display	Date and time display using internal clock or LTC input * Accuracy to within ± 10 sec/month (at 25°C)
LAN	10Base-T/100BASE-TX RJ-45 (Category 5) x 1
Consumables	Backup battery (internal clock): Replace every 5 years (in constant operating 24 hours a day at normal temperature)

Accessories

CD-ROM and Quick setup guide

2. External Dimensions

(All dimensions in mm.)

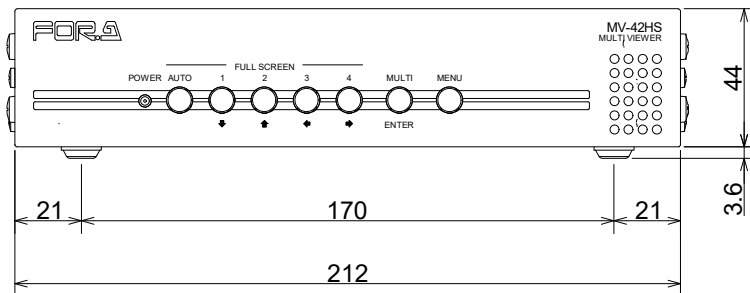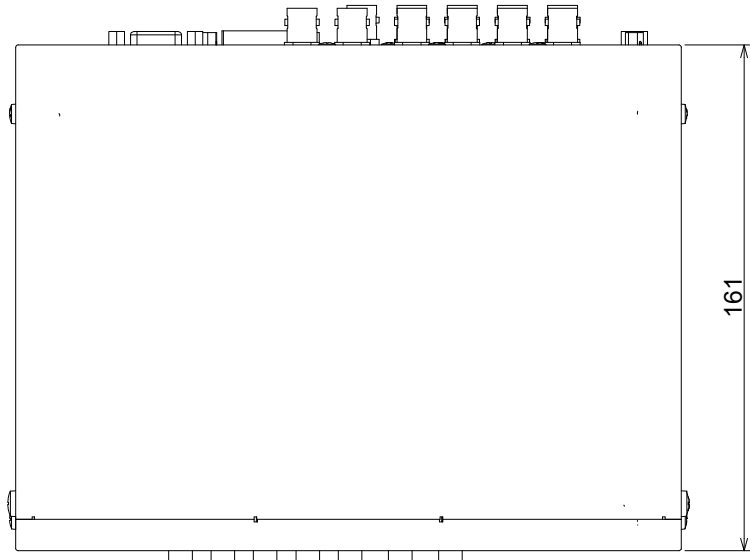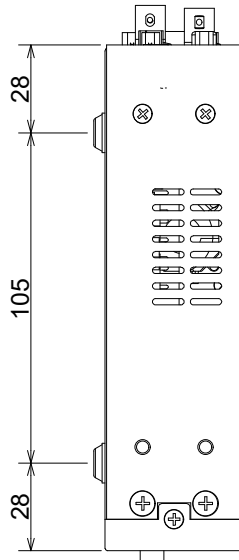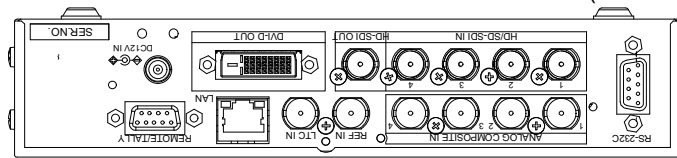



FOR-A COMPANY LIMITED www.for-a.com

ISO 9001 and 14001 certified
(Sakura R&D)

Head Office:

3-8-1 Ebisu, Shibuya-ku, Tokyo 150-0013, Japan
Tel: +81 (0)3-3446-3936

**FOR-A Corporation of America
Corporate Office/Service Center:**

11155 Knott Ave., Suite G, H & I, Cypress, CA 90630, U.S.A.
Tel: +1 714-894-3311

FOR-A Corporation of America Northeast Office:

Tel: +1 973-220-8471

FOR-A Corporation of America Southeast Office:

Tel: +1 305-773-7608

FOR-A Corporation of America Support Center:

2400 N.E. Waldo Road, Gainesville, FL 32609, U.S.A.
Tel: +1 352-262-5779

FOR-A Latin America and the Caribbean Miami Office:

Tel: +1 657-600-5759

FOR-A Latin America and the Caribbean Sao Paulo Office:

Tel: +55 11-99913-3751

FOR-A Latin America and the Caribbean Mexico City Office:

Tel: +52-55-5072-4969

FOR-A Europe S.r.l.:

Via Volturmo, 37, 20861 Brugherio MB, Italy
Tel: +39 (0)39-916-4811

FOR-A UK Limited:

Trident Court, 1 Oakcroft Road, Chessington, KT9 1BD, UK
Tel: +44 (0)20-3044-2935

FOR-A Italia S.r.l.:

Via Volturmo, 37, 20861, Brugherio MB, Italy
Tel: +39 (0)39-881-086

FOR-A Corporation of Korea:

1007, 57-5, Yangsan-ro, Yeongdeungpo-gu, Seoul 07271, Korea
Tel: +82 (0)2-2637-0761

FOR-A China Limited:

1618A Huateng Building, No. 302, 3 District, Jinsong, Chaoyang,
Beijing 100021, China
Tel: +86 (0)10-8721-6023

FOR-A Middle East-Africa Office:

DSC Tower, Office 207, Dubai Studio City,
P.O. Box 502688, Dubai, UAE
Tel: +971 (0)4-551-5830

FOR-A India Private Limited Corporate Office:

Unit No: 800, World Trade Tower, Sector-16, Noida-201301, Uttar
Pradesh, India
Tel: +91-120-4238674 / +91-120-4252330

FOR-A India Private Limited Mumbai Office:

202-203, Wellington Business Park No-01, Marol, Off, Andheri Kurla
Road, Andheri East, Mumbai-400059, Maharashtra, India
Tel: +91 22-49795570

FOR-A South East Asia Hong Kong Office:

Studio 09, Rm. A1, 3/F., Phase 1, Hang Fung Ind. Bldg., 2G Hok
Yuen St., Hung Hom, Hong Kong
Tel: +852-2110-9227

FOR-A South East Asia Singapore Office:

Tel: +65-8686-8086