

USF-212AS/212PS Datasheet

1. Specifications

USF-212AS Basic specifications

Temperature	0°C to 40°C
Humidity	30% to 90% (no condensation)
Power	100 to 240 V AC \pm 10%, 50/60 Hz
Consumption	670 VA (at 100 to 120 V AC at maximum output current) 660 VA (at 220 to 240 V AC at maximum output current)
Dimensions	440 (W) x 88 (H) x 401 (D) mm 480 (W) (Including rack mount brackets)
Weight	10 kg (Including 1 unit of power supply)
Consumables (at 24-hour operation)	Power unit: Within 5 years Cooling fan: Within 6 years

USF-212AS Technical specifications

Number of Modules	Max. 12
Genlock Input	BB: 0.429 Vp-p (NTSC)/0.45 Vp-p (PAL) or Tri-level Sync: 0.6 Vp-p 2 inputs: 75 Ω BNC x 1 and Loop-through BNC x 1 for each (Terminate with 75 Ω terminator, if unused.)
Interface	
Ethernet	100BASE-TX / 1000BASE-T RJ-45 x 2 (LAN 1, LAN 2) 100BASE-TX RJ-45 x 1 (LAN A)
GPI	9-pin D-sub Female

Options

USF-212PS	Redundant Power Supply Unit (AC cord clamp included.)
-----------	---

Accessories

AC cord, DVD-ROM, and Setup guide


USF-212PS Basic specifications

Temperature	0°C to 40°C
Humidity	30% to 90% (no condensation)
Power	100 to 240 V AC 50/60Hz
Consumption	670 VA (at 100 to 120 V AC at maximum output current) 660 VA (at 220 to 240 V AC at maximum output current)
Maximum Output Current	+12 V DC 58.4 A
Dimensions	68.6 (W) x 41.3 (H) x 397 (D)mm
Weight	2.5 kg

2. External Dimensions

USF-212AS

(All dimensions in mm.)

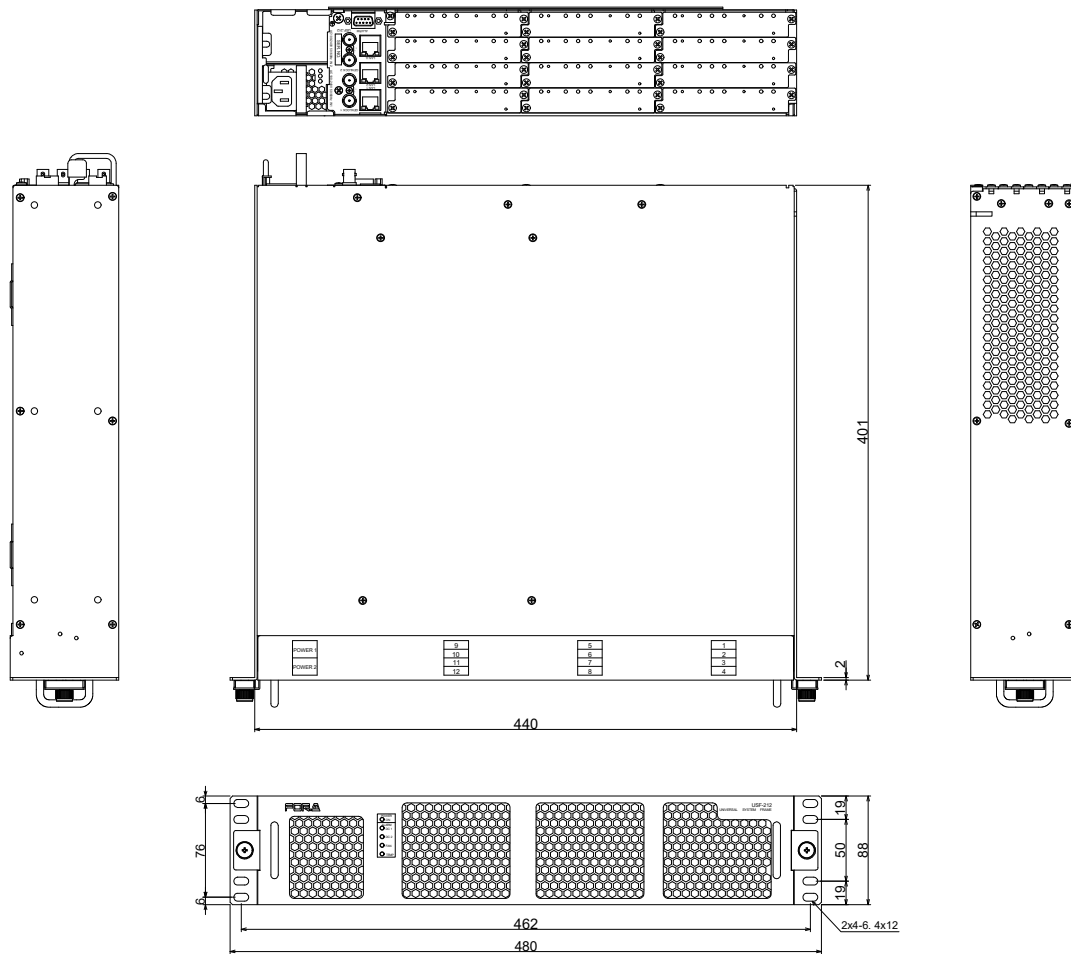

USF-212PS

(All dimensions in mm.)

