

VIRTUAL PROCESSOR/CHROMA KEYER VRP-100


Virtual processor with multi-format (3G/HD) support.
 Superior chroma keying backed by innovation.



Detailed compositing that outshines traditional chroma keying.
 FOR-A technology makes it possible. Now with multiviewer output.

- 1080p (Level-A) supported
- 3G/HD-SDI 8 inputs/4 outputs + 1 HDMI output, expandable to 14/6 or 12/8
- HDMI and VGA outputs supported (optional)
- Two lines for newly developed chroma keying
- Combine both lines for dual chroma keying
- DSK: Combine up to 5 layers (background + 4 DSKs)
- Redundant power supply
- Adjust gain/offset for each bus with built-in Proc Amp
- Frame Synchronizer on all inputs with captured image display and still store function
- Adjust chroma level and chroma phase
- Adjust camera input delay (up to 10 frames)
- Freely assign video to any window in the multiviewer, with 2/4/5/7/9/10/11/16 splits
- Title and tally display (up to 8 characters) on the multiviewer
- 24 GPIO (General Purpose Input/Output) pins
- Remote control via dual RS-422 ports

Block diagram

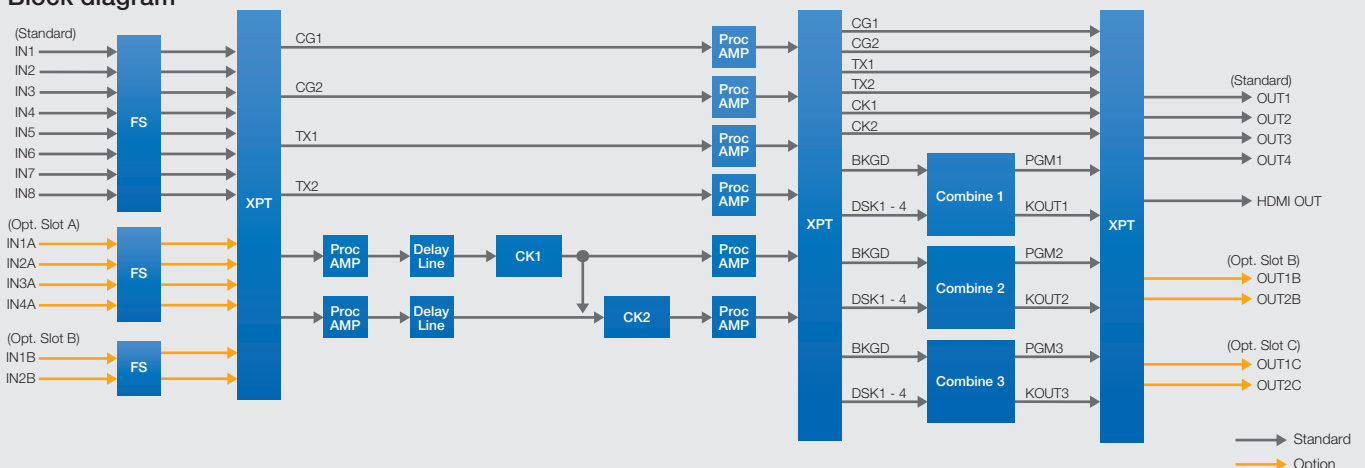

Specifications


Video Formats	3G-SDI: 1080/59.94p, 1080/50p (Level-A) HD-SDI: 1080/59.94i, 1080/50i, 720/59.94p, 720/50p
Processing	4:2:2:4 Component
Quantization	10-bit
Video Inputs	HD-SDI: 1.5 Gbps or 3G-SDI: 3 Gbps, 75Ω BNC x8 (Max. x14)
Video Inputs (Option)	Up to 2 cards can be installed (Total 3 slots for input/output card)
HVS-100DI-A	HD-SDI: 1.5 Gbps or 3G-SDI: 3 Gbps, 75Ω BNC x4 or x2 (Number of inputs will be changed by install slot)
HVS-100PCI (HDMI / VGA)	1080i: XGA to WUXGA, HDTV 1080p: HDTV 720p: XGA to WXGA, HDTV SD: VGA to XGA, SDTV HDMI (Type-A) or 15-pin D-sub (female) x2*1
Video Outputs	HD-SDI: 1.5 Gbps or 3G-SDI: 3 Gbps, 75Ω BNC x4 (Max. x8) HDMI: HDTV (audio outputs are CH1 and CH2 of embedded audio)
Video Outputs (Option)	Up to 2 cards can be installed (Total 3 slots for input/output card)
HVS-100DO	HD-SDI: 1.5 Gbps or 3G-SDI: 3 Gbps, 75Ω BNC x2
HVS-100PCO (HDMI: RGB)	1080p: HDTV 1080i: SXGA to WUXGA, HDTV 720p: SXGA, WXGA, HDTV HDMI (Type-A) or 15-pin D-sub (female) x2*1
HVS-100PCO (VGA)	1080i: SXGA to WUXGA (RGB), HDTV (YPbPr) 720p: XGA, WXGA (RGB), HDTV (YPbPr)
Genlock Input	BB: NTSC: 0.429 Vp-p / PAL: 0.45 Vp-p or Tri-level Sync: 0.6 Vp-p, 75Ω or loopthrough BNC x1 (Terminate with 75Ω terminate plug, if unused)
Genlock Output	BB: NTSC: 0.429 Vp-p / PAL: 0.45 Vp-p or Tri-level Sync: 0.6 Vp-p, 75Ω BNC x1
I/O Delay	3G-SDI: Approx. 3μs (Min. delay), HD-SDI: Approx. 6μs (Min. delay) 0 to 1 frame + Min. delay (FS) 1 to 2 frames + Min. delay (FS+CK) 1 to 2 frames + Min. delay (FS+CK1+CK2) 2 to 12 frames + Min. delay (FS+CK1+CK2+Delay line)
Frame Synchronizer (FS)	FSs on each inputs ANC data does not pass-through in FS mode
Chroma Keyer	4:4:4:4 RGBA 13-bit internal process (Color space convert and Up-sampling process)

Proc. Amp.	Adjusts Luminance level and Setup level
Color Control	Adjusts Chroma level and Chroma phase
DSK	Key Mix Mode: Normal, Add, Full Mix Layers: up to 5 layers Can be controlled of Key clip, Key gain and Transparency
Event Memory	100 events
Multi Viewer Channels	x 1 (2/4/5/7/9/10/11/16-splits) Display information: Source Titles, Tally
Delay Adjustments	0 H to 10 frames
Interfaces	
Ethernet	10/100BASE-TX, RJ-45 x1
RS-422	9-pin D-sub (female) x2
GPI	25-pin D-sub (female) x1 (24 inputs/outputs)
Temperature / Humidity	0°C to 40°C / 30% to 90% (no condensation)
Power	100 VAC to 240 VAC ±10%, 50/60 Hz
Consumption	Standard: 105 W (100 V AC to 120 V AC), 109 W (220 V AC to 240 V AC) Full features: 188 W (100 V AC to 120 V AC), 178 W (220 V AC to 240 V AC) *Redundant power supply is standard
Dimensions / Weight	430 (W) x 88 (H) x 235 (D) mm Standard: 6 kg, Full features: 7.6 kg
Consumables	
VRP-100	Power supply units: to be replaced every 5 years Cooling fans: to be replaced every 4 years
VRP-100RU	Button cell (CR2032): to be replaced every 3 years, no - conduction (in 24/7 applications at normal temperature)
Accessories	
VRP-100	CD-ROM (Operation Manuals), AC cord with connecting clip x2, Rack mount brackets
VRP-100RU	CD-ROM (Operation Manuals), AC cord with connecting clip x1, Rack mount brackets, Button film
Options	HVS-100DI-A: 3G/HD-SDI input card (4 inputs) HVS-100PCI: HDMI/VGA input card (HDMI x 2 or HDMI x 1 + VGA x 1) HVS-100DO: 3G/HD-SDI output card (2 outputs*2) HVS-100PCO: HDMI/VGA output card (HDMI x 2 + VGA x 1) VRP-100RU: Remote control unit

*1 Not compatible with HDCP


*2 Provides two down-converted outputs for HD only.

VRP-100 Dimensions




Unit: mm

VRP-100 Rear Panel

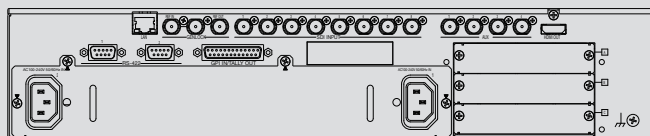


VRP-100RU Dimensions

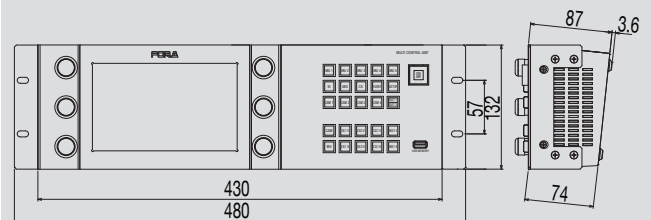

Unit: mm

VRP-100RU Rear Panel

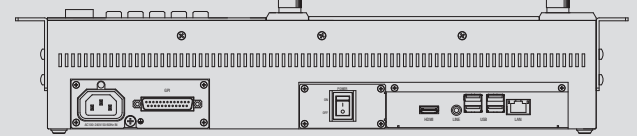

Head Office: 3-8-1 Ebisu, Shibuya-ku, Tokyo 150-0013, Japan

- FOR-A Corporation of America:** Tel: +1-714-894-3311
11155 Knott Ave. Suite G&H, Cypress, CA 90630, U.S.A.
- FOR-A Corporation of America East Coast Office:** Tel: +1-201-944-1120
2 Executive Drive, Suite 670, Fort Lee Executive Park, Fort Lee, NJ 07024, U.S.A.
- FOR-A Corporation of America Distribution & Service Center:** Tel: +1-352-371-1505
2400 N.E. Waldo Road, Gainesville, FL 32609, U.S.A.
- FOR-A Corporation of America Miami Office:** Tel: +1-305-931-1700
5200 Blue Lagoon Drive, Suite 760, Miami, FL 33126, U.S.A.
- FOR-A Corporation of Canada:** Tel: +1-416-977-0343
1131A, Leslie Street #209, Toronto, Ontario, M3C 3L8, CANADA
- FOR-A Europe S.r.l.:** Tel: +39-039-879-778
Via Volturmo, 37, 20861 Brugherio MB, Italy

ISO 9001 and 14001 certified (Sakura R&D)

<http://www.for-a.com/>

- FOR-A UK Limited:** Tel: +44-(0)20-3044-2935
Trident Court, 1 Oakcroft Road, Chessington, KT9 1BD, UK
- FOR-A Italia S.r.l.:** Tel: +39-039-881-086/103
Via Volturmo, 37, 20861, Brugherio MB, Italy
- FOR-A Corporation of Korea:** Tel: +82-(0)2-2637-0761
1007, 57-5, Yangsan-ro, Yeongdeungpo-gu, Seoul 150-103, Korea
- FOR-A China Limited:** Tel: +86-(0)10-8721-6023
708B Huateng Building, No. 302, 3 District, Jinsong, Chaoyang, Beijing 100021, China
- FOR-A Middle East-Africa Office:** Tel: +971-(0)4-551-5830
Dubai Media City, Aurora Tower, Office 1407, P.O. Box 502688, Dubai, UAE
- Agiv (India) Private Limited (FOR-A India):** Tel: +91-22-2405-1258
85, V.N. Purav Marg Sion-Chunabhathi (E) Mumbai - 400 022